

Study of Road Accident Trends at Johor State Road Using Analytical Hierarchy Process (AHP) and Geoda

Nur Azreen Farahin Mohd Fadzli¹, Saifullizan M. B^{2*}

¹Department of Civil Engineering and Built Environmental,
Universiti Tun Hussein Onn Malaysia, 86400 Parit Raja, Johor, MALAYSIA

² Department of Civil Engineering and Built Environmental,
Universiti Tun Hussein Onn Malaysia, 86400 Parit Raja, Johor, MALAYSIA

*Corresponding Author Designation

DOI: <https://doi.org/10.30880/rtcebe.2021.02.01.007>

Received 30 January 2021; Accepted 28 April 2021; Available online 30 June 2021

Abstract: Road traffic accidents are usually happened and keep increasing year by year in Malaysia. It will give a adverse impact at the road also to the road user. It has been announced every day in the social media, television broadcast, radio and newspaper. There are several causes that contribute to the accident such as faulty vehicle, uneven roads, driver behavior and many more. So, with all these causes, it might be the reason why the road accidents keep on increasing. The purpose of this case study is to determine the highest road accident ranking based on the types of injuries at the state road, Johor. Then, another purpose is to identify the current traffic accident trends. To accomplish the first purpose of this study, secondary data which is from Balai Polis Traffic, Batu pahat will be used to get an accident data and the Analytical Hierarchy Process (AHP) will be proceed to find the road accident ranking based on the types of injuries. This case study will use the five years of road accident data which is from the year 2016 until October 2020. Next, Geoda will be used to insert the data about the road accident trends. With those analysis, the highest road accident ranking based on the types of injuries and the road accident trends can be obtained and achieve all the objective of this case study. Besides that, it will be useful as a reference to any party in the future for the road traffic management.

Keywords: AHP, Geoda, Road Accident Trends

1. Introduction

Road traffic accident is the inescapable incident that can happens anytime anywhere, and it is the one common thing in the world. World Health Organization (WHO) said that the road accident injuries are about 1.25 million people with another 20-50 million individuals that being physically disabled as a result of road accidents. According WHO, in the year 2020, accident fatalities will become the fifth leading cause of the death worldwide based on the current trends. Besides that, the

*Corresponding author: saifulz@uthm.edu.my

2021 UTHM Publisher. All right reserved.

publisher.uthm.edu.my/periodicals/index.php/rtcebe

traffic accidents also will cause of high economic losses due to the traffic congestion such as traffic delay, travel time unreliability, supply chain interruptions, increase in noise pollution and deterioration of air quality. Moreover, the main reason among the traffic accident is occur according to the netizen's dangerous road condition and unsafe vehicles. In the year 2020, the rate should be reduced because Malaysia struggle to be a developed country in this year. Therefore, to avoid the road traffic accident being increases every year, the case study is conducted. The locations of the study were selected at the Johor state road. From this case study the highest road accident ranking by types of injuries and the current traffic accident trends can be found.

2. Literature Review

In this literature review, there has a several issues that will be discussed and need to conduct which is to analyses the increasing of the road traffic accidents. In this study, the analysis will be focus on the Johor state road, which is the Analysis of highest accident ranking and traffic accidents trends will be carried out.

2.1 Road Accident

In WHO, the major causes of death is the road traffic accidents which is indict a million lives every year in the world [1]. Over the past five year, Malaysia have experienced the road accident and fatalities which is the global problem in the road traffic accident [4]. The massive contributors to the road traffic accidents is the human factor, while 60% is the speeding behavior. It can be predicted, that the number of fatalities will increase from 5.1 million in 1990 to 8.4 million in 2020 based on the WHO [2].

2.2 Traffic Information

The serious concern to the community and authority is the traffic accidents which considered as an unplanned and unfortunate event. The cause of the accident infrequently happens in the situation which is only one thing or in one person only. The Average Annual Daily Traffic (AADT) and speed of vehicles were used in the research for the traffic information [5]. In year of 2010, 2011, 2012 and 2013, the AADT was provide by the ministry of works Malaysia Highway planning unit road traffic volume Malaysia (Prasetijo et al. 2019). In this organization, it conducts a bi-monthly study at each year in a specific station in April for the first half data and in October for the other half year data [5]. Next, for every types of vehicles, data were collected hourly from 0600 until 2200 hours.

2.3 Analytical Hierarchy Process (AHP)

Many fields have been used the AHP, such as health issues, banking, management and business, sciences and engineering sources. Process of Analytical Hierarchy is a mathematical device in multi-criteria result making which designing the result factors in hierarchy problem structure [3]. Other than that, structuring the criterion hierarchy of Multi-Criteria Decision Making (MCDM) were using to resolve and help decision makers in making resolution for the complex problem which is the main target of the AHP [3]. AHP is known as a very powerful tools for decision making. The procedure of AHP is the determination of focus or aim of the problem that must be recognize and it will consider as the first level for the AHP hierarchy, next it will be multiple criterion that explain the alternatives and the last level is the provide alternatives for the focus [3]. For the measurement, the standard scale with absolute numbers will be use in order to control the weight of each alternatives. The weight can be used as contrast and ranking the alternatives of the problem and direct the decision maker in making option [3].

2.4 Traffic Information

Geoda-web is make as a cloud to cloud solution that applies the latest web technologies to combine any cloud based software services and Application Programming Interfaces (API) [6]. Spatial Data analysis where the latter is taken to contain of visualization, exploration and explanation of attractive patterns in geographic data which is the introduction to GeoDa [6]. In many aspects, it is a reinvention of the original space stat package, which by now has become really dated, with single a

rudimentary user interface, an outdated architecture and show constraints for medium and large data sets [6]. On all sides of the central idea of dynamically linked graphics was redesign and rewritten from scratch by Geoda. This shows, that it gives different views of the data that represented graphs, maps or table with selected monitoring in one highlighted in all [6].

3. Methodology

In this chapter, flow chart has been prepared at the subtopic below to show the project running. Next, to achieve the objective of this case study, the data has been collected from personnel authorization. Furthermore, AHP and Geoda will be use in this study. Besides that, AHP will be used to determine the highest accident ranking by types of injuries and Geoda will be used to identify the road accident trends.

3.1 Methodology Flowchart

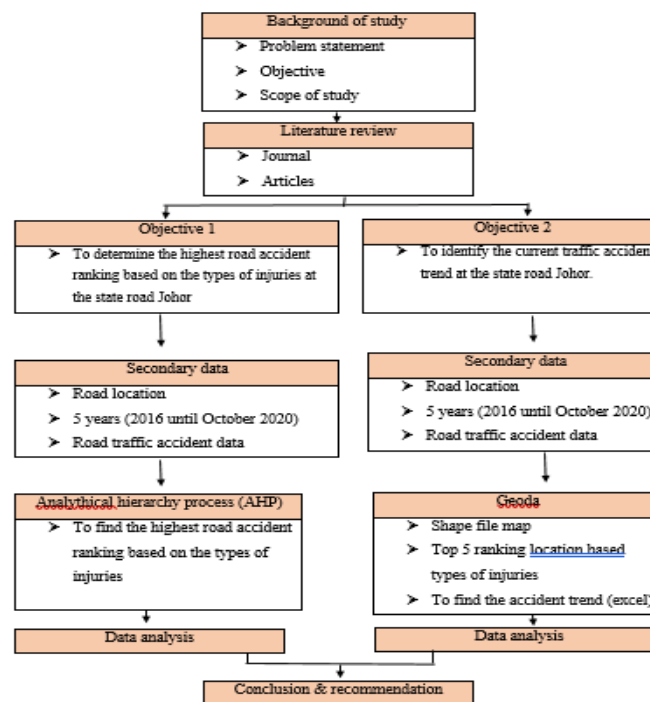


Figure 3.1: Flowchart

3.2 Literature Review

Research of the literature review was done to get the fact relevant to the research subject. In this study, the research was focused in the reading materials or reference such as journals, articles, books and internet that has some analysis and the thesis of previous study that related for this research.

3.3 Objective 1 (Highest Road Accident Identification)

Based on the data accident by the local authorizations, the data analysis can be carried out by using the AHP. Next, the AHP will be used to identify the highest road accident ranking by types of injuries for the 5 year, which is from the year 2016 until October 2020.

3.3.1 Secondary Data

For the data collection, to include the data for Road accident based time to time, the data will be gathered based on the secondary data. The secondary data were collected through the personnel authorization at Police Traffic Department, Batu Pahat, Johor to query about the specification and accident history of the road accident data. The data from Police Traffic Department Batu Pahat, Johor has stated this element that can be used in this case study. The example element is, year of accident, location of accident, and the types of injuries involve.

3.3.2 Analytical Hierarchy Process (AHP)

From the AHP, the highest road accident ranking by types of injuries in the year 2016 until October 2020 can be obtained. This method used a mathematical device in multi-criteria result making, which is show the result factors in hierarchy problem structure.

In order to find the result, the AHP procedure need to be follow. First, hierarchy structure will be doing by focus the problem that must be recognize and it will consider as the first level of the AHP hierarchy. Next, find the criteria or category that need to be include in the hierarchy structure.

3.4 Objective 2 (Accident Trend)

In this subtopic, it will use an excel and the geoda software to insert the data of the road accident that have been ranked in the AHP. The shape file map of the location will be inserted in the geoda. The accident trends also will be analysed based on the types of injuries and the 5 year of road accident data from the 2016 until October 2020. This road accident trends shows the different views of data, for the example is graphs, maps and table. The secondary data from the authorization department will be use in this method.

3.4.1 Secondary Data

Secondary data for this section has been use. The data has been analysed and it will select the top 5 highest location followed by the result of the AHP which is the highest road accident ranking based on the types of injuries to insert the data in the Geoda software also in the excel to show the road accident trends.

3.4.2 Geoda

Based on the Geoda software and by using the excel, the road accident trends by types of injuries in the year 2016 until October 2020 can be obtained. This method used cloud to cloud solution that applies the latest web technologies to combine any cloud based software services and application programming interfaces. The phase in geoda must be followed to insert the shapefile map in other to find the result. Next, after inserting the maps, the table from the excel that has the top 5 highest location will be add into the geoda. Next, the trends of the road accident will be analysed in the excel software to show the current of the road accident trends.

3.5 Data Analysis

This subtopic, which is the data analysis is very important for this case study. The data that have been collected will be analysed based on the AHP and Geoda as a method to achieve the objective in this case study. The result of the data analysis will show the highest road accident based on the types of injuries and the trends of road traffic accident at the Johor State road. Moreover, the secondary data for the road accident, related articles will be use in this study as a reference. The accident data that will be collected and use in this case study will be analyses for more detail based on the data traffic road accident.

4. Data Analysis

In this chapter, in order to achieve the objective, the data collection have been done by collecting the road accident data at the personnel authorization which is at the Balai Trafik Batu Pahat. The data analysis will be carried out by using the method analytical hierarchy process to get the highest accident ranking by types of injuries. Next, the geoda will be used to analyse the

accident trend at the state road, Johor. The road accident data will take in 5 years, which is the year 2016 until October 2020.

4.1 Total of Road Accident

Based on the analysis, the total accident trends based on the types of injuries which is fatal, serious, minor and wreckage injuries in each location at the state road johor in the year 2016- October 2020 have been analysed . It can be seen that the fatal road accident trends shows that the highest accident location is in the year 2018 which is at the Jalan Bukit Pasir – Tongkang Pecah and Jalan Parit Jalil . The lowest accident trends is in the year 2019 which is at the Jalan Sg Nibong Semerah and Jalan Rejosari. Next, the accident trends of serious injuries show that the highest accident is in the year 2020, which is at Jalan Parit Jalil. The lowest accident trends is in the year 2016 which is at Jalan Simpang Lima – Parit Sulong. For the minor injuries, the highest accident is in the year 2018 at the Jalan Bukit Pasir – Tongkang Pecah and the lowest is at the year 2020, which is at Jalan Haji Ariff Sri Medan. Lastly, at the wreckage injuries, the highest value for road accident is in the year 2019, which is at the Jalan Bukit Pasir-Tongkang Pecah and the lowest value is in the year 2020, which is the total road accident value is zero.

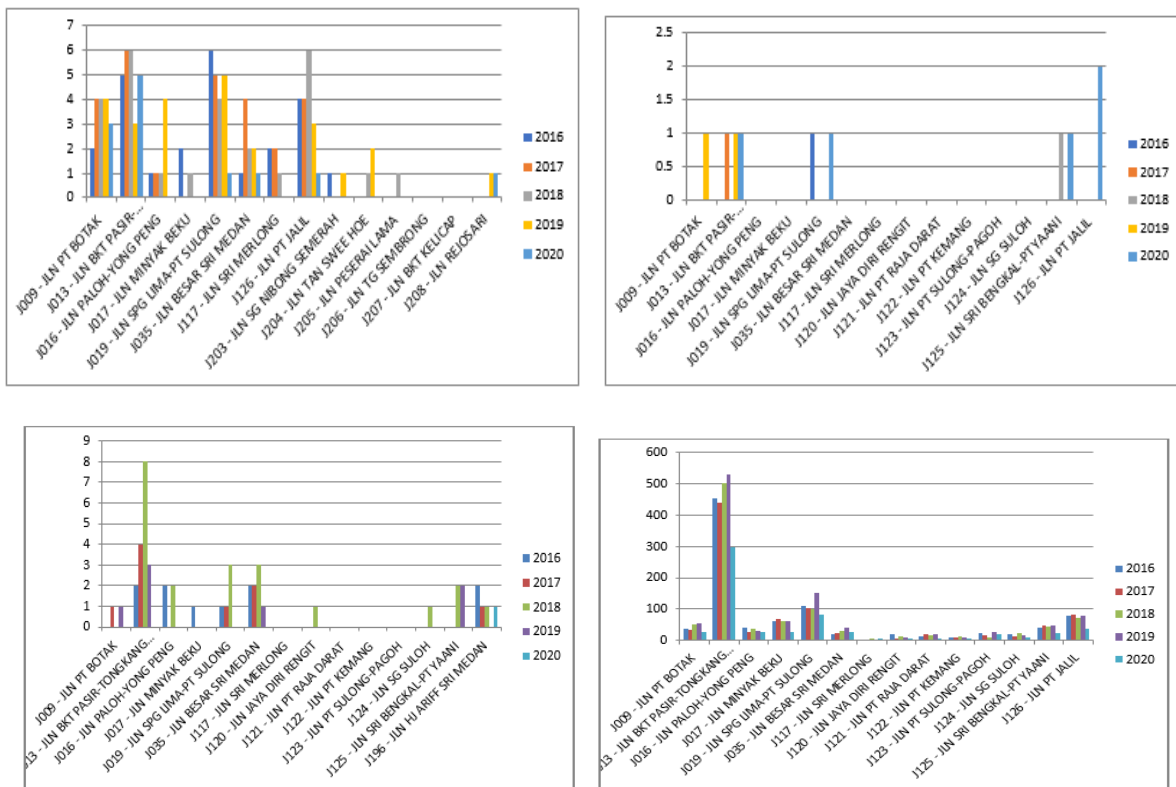


Figure 4.1: Road accident trend based on types of injuries from 2016- October 2020 at the state road Johor

Table 4.1: Shows the total of road accident based on the types of injuries in 5 years 2016 until October 2020

Year / Types of Injuries	2016	2017	2018	2019	2020
Fatal	38	36	37	29	17
Serious	1	3	2	3	5
Minor	15	17	23	10	1
Wreckage	1226	1199	1292	1375	777

4.2 Consumption of Analytical Hierarchy Process (AHP)

Once the data has been collected at the Balai Trafik, Batu Pahat. The analytical Hierarchy Process will be used. The first step is total up the accident by the year and the types of injuries and the data will be insert by following the step at the analytical Hierarchy Process, which is the first step is to make the hierarchy structure, then the next step is using the pairwise. By using this method, the highest road accident by types of injuries can be found.

4.2.1 Hierarchy Structure

Hierarchy structure is the structure that built through the top with the goal of decision and from a wide perspective through the objective and intermediate level to the lowest level. Normally, the main objective is defined through a bottom up process either through the top down process by access a correlated problem that seeking a solution through it.

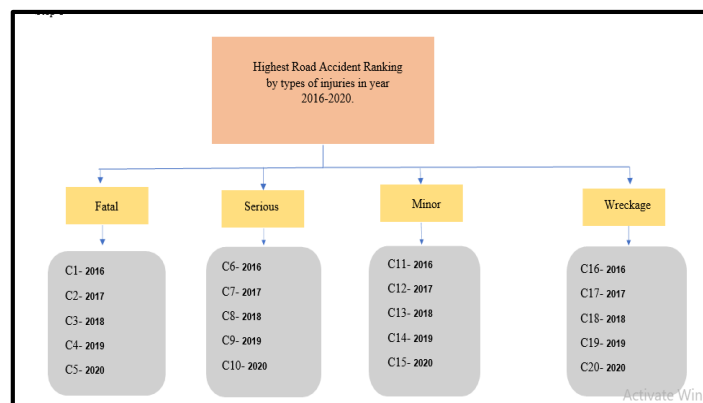


Figure 4.2: Shows the hierarchy structure by the types of injuries in the year 2016-2020.

4.2.2 Pairwise Comparison Scale of Analytical Hierarchy Process (AHP)

The element in the upper level is used to compare the element in the level immediately under some respect to it, which is the one matrix must be built for each criterion in the upper level. The differentiation is made by a scale to show how much time more essential or dominant one element is over other element with the respect of criterion with respect to which they are compared. The scale number 9 is more important to the scale number 1 which is equal range. It is use as a verbal scale for measurement quantitative and the criteria of qualitative. Table 4.2 shows the Pairwise comparison scale for AHP preference.

Table 4.2 Shows the Pairwise comparison scale for AHP preference.

Preference on pair wise comparison	Preference number
Equally important	1
Moderately more important	3
Strongly more important	5
Very strong more important	7
Extremely more important	9
Intermediate value	2,4,6,8

Step 1: calculate the weighting value for each criterion. Scale that being used are based on the table 4.1 and table 4.2.

FATAL					
	C1	C2	C3	C4	C5
C1	1	0.14	0.14	0.14	0.14
C2	7	1	7	5	5
C3	7	0.14	1	5	5
C4	7	0.2	0.2	1	5
C5	7	0.2	0.2	0.2	1

Step 2: multiply the scale of each criterion by the value of each weight to get the total 1.

FATAL						
C1	1	0.14	0.14	0.14	0.14	0.30738
C2	7	1	7	5	5	4.14598
C3	7	0.14	1	5	5	1.895978
C4	7	0.2	0.2	1	5	1.475773
C5	7	0.2	0.2	0.2	1	0.561872
	Total 1					8.38698

Step 3: Divide the amount by the weight to get the total 2.

FATAL	
C1	8.38698/0.307381 = 27.29
C2	8.38698/4.14598=2.02
C3	8.38698/1.895978=4.42
C4	8.38698/1.475773 =5.68
C5	8.38698/0.561872 =14.93
	Total 2 54.34

Step 4: Calculation of Consistency Index (CI) and Consistency Ratio (CR). N value is the number of criteria that has been use.

Table 4.3: Random Inconsistency Index (RI) value refers to the number of criteria.

n	1-2	3	4	5	6	7	8	9
RI	0.0	0.58	0.90	1.12	1.24	1.32	1.41	1.45

$$\lambda = \frac{Total\ 2}{n} = \frac{54.34}{5} = 10.87$$

$$Consistency\ test, CI = \frac{\lambda - n}{n - 1} = \frac{10.87 - 5}{5 - 1} = 1.47$$

$$\text{Consistency Ratio, CR} = \frac{CI}{RI} = \frac{1.47}{1.12} = 1.31$$

By using this AHP the road accident data by types of injuries has been rank by using this formula. Which are the wreckage injuries having the highest location accident then follow by the fatal, minor and serious in the year 2016-2020.

4.3 Top 5 Ranking for Road Accident Location

To shortlist it into an easy information, the simplest way that being used is by using the ranking sites which are the recommended use in Malaysia. From the analysis, the data has been listed from each location about the total of road accident for each location at the state road Johor. From the data listed, the 5 highest value will be selected as the top 5 ranking road accident location based on the types of injuries from the year 2016 until october 2020.

Table 4.3: Shows the top 5 ranking locations by types of injuries in 2016 until October 2020

Fatal	Serious	Minor	Wreckage
J009- Jalan Parit Botak	J013- Jalan Bukit Pasir- Tongkang Pechah	J013- Jalan Bukit Pasir- Tongkang Pechah	J013- Jalan Bukit Pasir-Tongkang Pechah
J013- Jalan Bukit Pasir- Tongkang Pechah	J019- Jalan Simpang Lima- Parit Sulong	J016- Jalan Paloh- Yong peng	J017- Jalan Minyak Beku
J019- Jalan Simpang Lima- Parit Sulong	J125- Jalan Sri Bengkal-Pt Yaani	J019- Jalan Simpang Lima- Parit Sulong	J019- Jalan Simpang Lima – Pt Sulong
J126- Jalan Parit Jalil	J126- Jalan Parit Jalil	J035- Jalan Besar Sri Medan	J126- Jalan Parit Jalil
J209- Jalan Parit Karjo	J209- Jalan Parit Karjo	J125- Jalan Sri Bengkal-Pt Yaani	J204- Jalan Tan Swee Hoe

4.4 Data Result Using Geoda

Geoda is the collection of software tools designed to implement techniques for exploratory spatial data analysis that provide a user friendly and graphical interface to methods of descriptive spatial data analysis. For the example, is auto correlation statistics and indicators of spatial outliers. Besides that, it has the technology of dynamically linked windows that consists an interactive environment that combines maps with statistical graphics. In this chapter, the result from analytical hierarchy process will be use in geoda. The steps by using the geoda will show on the figure below.

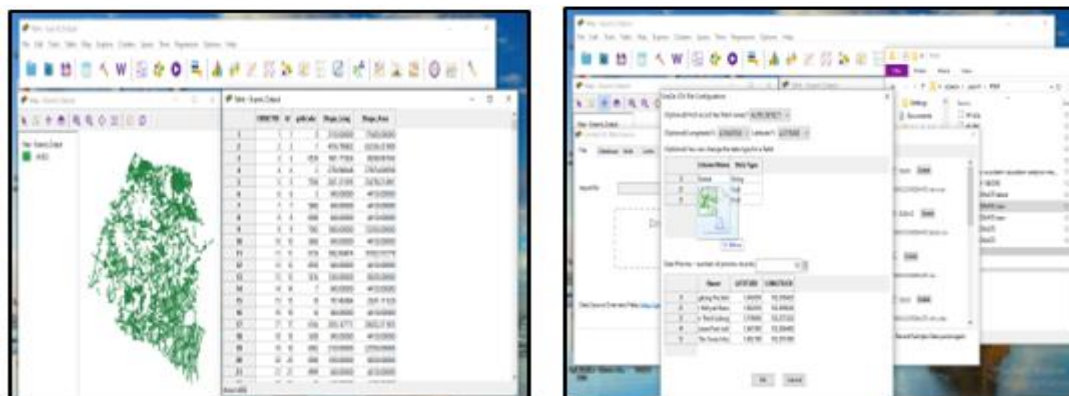


Figure 4.3 Shows the attribute table based on the state road maps Johor and additional table that has top 5 highest location in wreckage injuries

4.5 Data of Road Accident Trends

This data will show the road accident trends based on the types of injuries that have been rank in the Analytical Hierarchy Process in the year 2016 until October 2020. The data shows that the location at wreckage injuries has more accident occur compare to the other locations.

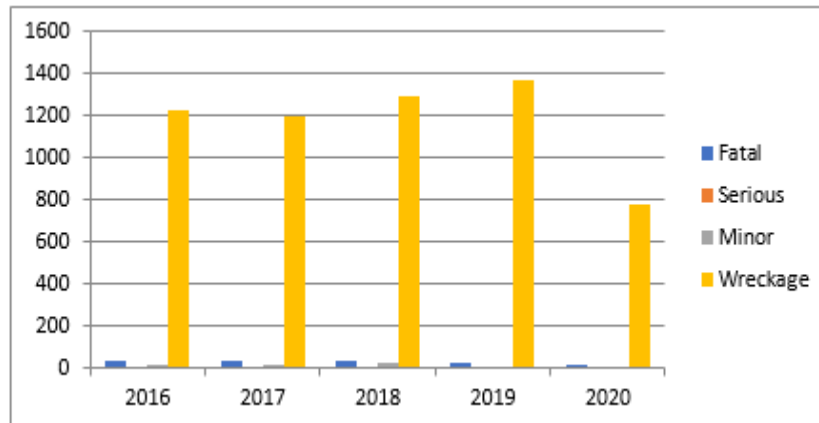


Figure 4.4: Shows the road accident trends based on the types of injuries in 2016 until October 2020

4.6 Analysis of Selected Section

After the analysis have been done by using Analytical Hierarchy Process and the geoda, this figure below shows the top 5 location that has been stated in the top 5 ranking for the highest road accident in the state road Johor for the year 2016 until October 2020. The location is different based on the types of injuries that have been state at the table 4.8.

5. Conclusion

The first goal is accomplished by the secondary data from Balai Traffic Batu Pahat Johor based on the accident data that have been obtained in the year 2016 until October 2020. In order to find the highest ranking based on the types of injuries, the road injury data has been analyzed and summarized so that the data can be included in the first form, which is by using the AHP. The method of AHP can be help to assess the weight and rank of the road accident by using this mathematical equation. In this method it has 7 step to follow, which is the first step is to conduct a hierarchy structure. The hierarchy structure has state the factor which is the highest ranking by types of injuries has been found, which is the highest is Wreckage injuries that has the consistency ratio 2.92 which is the highest then the other value. Next, the fatal injury has the second highest val ue which is 1.31, the minor is 0.88 and the lowest value is in the serious injuries , which is 0.70 in consistency Ratio. For the conclusion, by using the AHP it is more easy to find the rangking at any of problem issues and by using this method it can use primarily used to weigh the parameters and pick and rate the alternatives that have been chosen. Moreover, these findings concerning the outcome of the AHP application depended solely on the adequacy of the model and the technology. It will help the recommendation for future research on the complexities of implementing AHP in order to determine the best parameters, achieve consensus on the need for the results or to modify the framework.

Through the objective one, which result in the highest road accident ranking based on the types of injuries, the data from there were analyzed and the top 5 ranking location based on the top 5 highest location by types of injuries were found. From here, the data will be use in Geoda after inserting the maps of Johor state road. From the data, the current of road accident trends based on the data location, that including the 5 years accident were made to achieve this objective. The accident trends show that the wreckage injuries have the highest accident record in 2019 then follow by the year 2018, 2016, 2017 and the lowest in year 2020. In 2020, the data of the accident is decreases, it is because the data is not fully recorded, it is just in January until October 2020 and the other reason is because the Johor state

road has some improvement in road geometry, road environment and the maintenance at the road defect is regularly doing.

Acknowledgment

The authors would also like to thank the Faculty of Civil Engineering and Built Environment, Universiti Tun Hussein Onn Malaysia, for its support.

References

- [1] Dhruval, P., & Bhagat, S. (2019). *A Review Study on Road Accident in India*. 1506–1508.
- [2] Masuri, M. G., Md Isa, K. A., & Mohd Tahir, M. P. (2017). Children, Youth and Road Environment: Road traffic accident. *Asian Journal of Environment-Behaviour Studies*, 2(4), 13. <https://doi.org/10.21834/aje-bs.v2i4.206>
- [3] Najib, L., Abdullah, L., Abdullah, I., & Salleh, Z. (2012). Weight of road accident causes using analytic hierarchy process. *ARPJ Journal of Science and Technology*, 2(2), 39–44.
- [4] Mohamad, F. F., Abdullah, A. S., & Karim, M. R. (2018). U Nderstanding O F S Peed B Ehaviour I N R Elation T O R Oad T Raffic a Ccident : a C Omparison B Etween M Alaysian a Nd. 30(August 2017), 23–36.
- [5] Omar, N., Prasetijo, J., David Daniel, B., & Abdullah, M. A. E. (2017). Accident Analysis and Highway Safety. *MATEC Web of Conferences*, 103, 1–7. <https://doi.org/10.1051/mateconf/201710308002>
- [6] Li, X., Anselin, L., & Koschinsky, J. (2015). GeoDa Web - Enhancing Web-based mapping with spatial analytics. *GIS: Proceedings of the ACM International Symposium on Advances in Geographic Information Systems*, 03-06-Nov, 1–4. <https://doi.org/10.1145/2820783.2820792>